

Waterix COOLIT 17000




Waterix **COOLIT**[®] -cooler is easy to install and service. The efficiency of the cooler is higher than in cooling towers. Its main applications are cooling of industrial process water and wastewater or heating plant's turbine waters.

Benefits

- High operational efficiency for low energy consumption
- Robust design for minimal maintenance
- Low initial investment
- Easy and fast to install
- Effective water mixing and aeration
- Energy can be stored in water basin
- Very easy adjusting of cooling power

PRODUCT SPECIFICATIONS

- **Motor** 5.5 kW
- **Cooling output** 17.0 kg air/s
- **Oxygen transfer rate** 870 kgO₂/d
- **Spray diameter** 13 m
- **Weight with floats** 100 kg

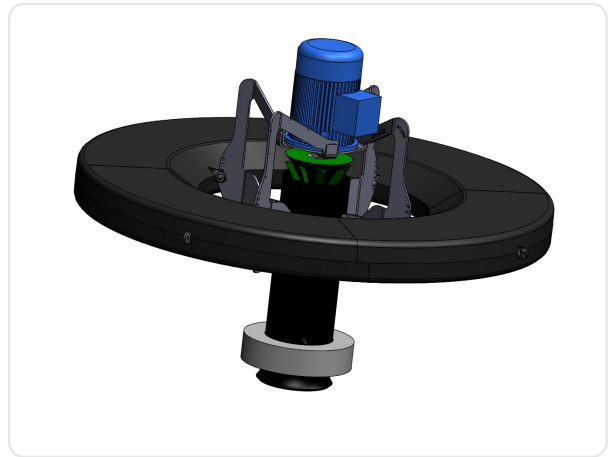

Waterix COOLIT® coolers have a superb structure that does not get dirty and is maintenance-free, as it does not have any parts liable to blocking such as nozzles.

Compared to other systems on the market, the acquisition cost of the Waterix COOLIT® 17000 cooler is low, efficiency is high and installation is easy, quick and affordable.

Waterix Oy

Betonikuja 5, 21600 Parainen, Finland
info@waterix.com